MadJax® Ascent™ One-Piece Windshield Instructions

09-328

ITEMS INCLUDED

- (6) ¼-20, 2 ¼ Length Screws
- (6) ¼-20 Locknuts
- (12) ¼" Washers
- (6) Spacers

TOOLS NEEDED

- 10mm socket and/or wrench
- Drill
- 15/64 Drill Bit

SAFETY PRECAUTIONS

- Park cart on level ground.
- Turn the key and battery OFF and set parking brake.

It is recommended to leave the protective film on the windshield during the installation process to prevent scratching and in case a return is needed. You will need to gently roll the film away from the edges to install the channels.

STEP 1

Remove the existing windshield.

STEP 2

Put spacers in semi-circle cutouts on windshield edges.




STEP 3

Position windshield so spacers line up with holes on strut.

Insert bolt with washer through bottom 4 spacers from outside the cart to the inside.

Add another washer and locknut to each bolt and hand-tighten (these will be removed in the next step).

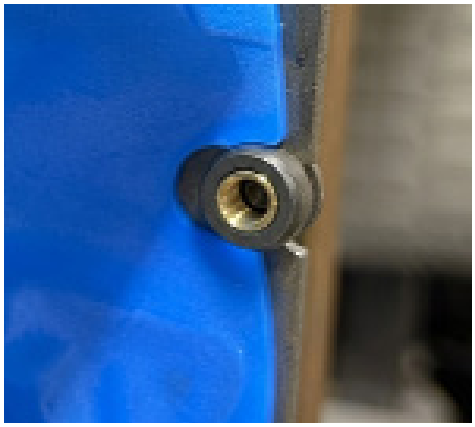

STEP 4


You will need to drill into the strut for the top bolts (One on each side).

A. With the windshield on, mark the struts where the 2 top bolt holes will need to be drilled.

B. Remove windshield.

C. Drill the holes into the strut, where marked, using a 15/64 drill bit.

D. Once the 2 holes are drilled into the top of each strut, reinstall windshield and tighten all hardware using a 10mm socket and/or wrench.

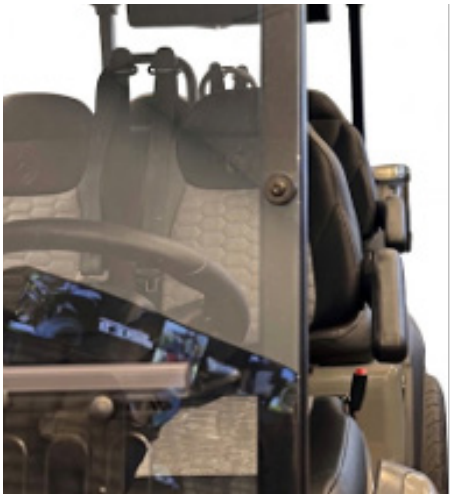

STEP 5

Finish removing film that is on the windshield.

STEP 6

Check vent attachments.

A. Ensure the vents are properly aligned with the track.

B. Hand-tighten until snug.



⚠ CAUTION

Do **not** overtighten the vent bolts. Overtightening can cause the windshield to crack.

FINAL INSPECTION

Verify all the locknuts are tight between the windshield and the struts.

INSTALLATION COMPLETE

RedDot

Cleaning Instructions & Caution

By using the proper cleaning methods and cleaning materials, you can prolong the useful life of your plastic windshield significantly. Adversely, use the incorrect techniques or cleaning materials and you could ruin your windshield in a single cleaning. Please read these instructions completely to prevent possible damage to your new Windshield.

1. GENTLY rinse your windshield completely with ample amounts of water to remove any debris collected on it, then use a soft cloth or sponge and a mild detergent or soap to wash away any remaining film or dirt. Lukewarm water tends to offer the best results. It is best to always wipe from top to bottom you clean. Never use a circular pattern or change directions each time as this will cause a fog like result over time. Always wipe in one direction to dislodge and remove any dirt from your windshield.

2. Next, use an ample amount of water to rinse the windshield, removing any remaining soap or detergent.

Note: Never "scrub" vigorously or with heavy pressure against the windshield. This will severely scratch the windshield reducing visibility.

3. Finally, GENTLY dry the windshield using a separate clean soft cloth, also wiping in the same top to bottom direction or use a gentle patting motion to help absorb remaining spots of water droplets.

CAUTION

Never use paper towels as they can be VERY abrasive.

Never use abrasives or highly alkaline cleaners.

Never scrape with razor blades or sharp objects.

Never use products which have benzene leaded gasoline, acetone or carbon tetrachloride chemicals included in them.

Never clean in the hot sun or at elevated temperatures.

E-Z-GO®, TXT®, RXV® and S4® are registered trademarks of Textron Innovations, Inc. Club Car®, Precedent®, DS®, Onward® and Tempo® are registered trademarks of Ingersoll Rand, Inc. Yamaha®, Yamaha® Drive®, Drive2®, G-14®, G-16®, G-19®, G-22® and G-29® are registered trademarks of Yamaha Golf-Car Company. Any reference to Club Car®, E-Z-GO®, or Yamaha® or their associated trademarks, word marks, and products are only for purposes of identifying golf carts with which this RedDot product is compatible. RedDot products are aftermarket parts and are not original equipment parts. RedDot is not connected to, affiliated with, sponsored by, or endorsed by either Textron Innovations, Inc., Ingersoll Rand, Inc., Yamaha Golf Cart Company, or any of their parent or subsidiary companies.

RedDot®