



Speaker and Amplifier Installation Instructions

Section 1 - Installation Preparation and Tools

Tools Needed:
Electric Screwdriver
Hex Shank Hex Bit
Hex Shank Phillips Bit
Wire Cutters or Scissors
Cable Ties

Section 2 - Install Dashboard Speaker (Same for Driver/Passenger Side)


STEP 1

Use an electric screwdriver to remove the speaker cover screws. Retain hardware for later use.



STEP 2

Remove the speaker cover.

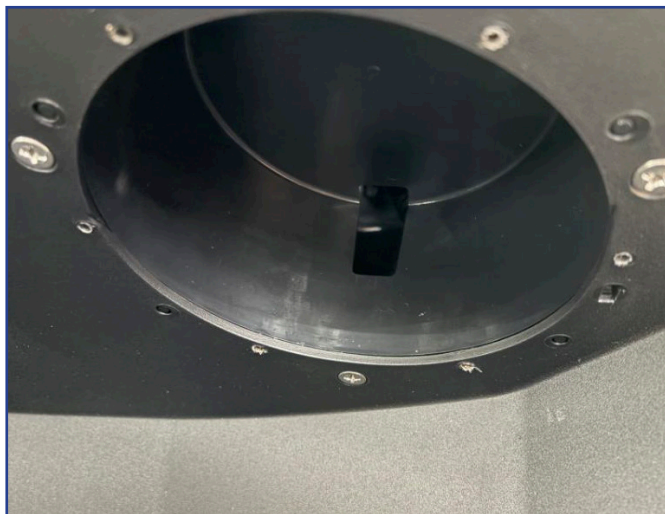

STEP 3

Take out the storage box on the driver/passenger side of the dashboard (place the box aside and protect it to avoid scratching the dashboard).



STEP 4

Locate the speaker audio wire and ambient light wire within the storage box opening. Thread the wiring harness through the hole in the speaker inner cover.



STEP 5

Connect the wiring harness to the speaker (ensure the hook is engaged).



STEP 6

Place the speaker into the mounting position and secure it with an electric screwdriver (the logo on the speaker cover should face forward).



Section 3 - Install Roof Speaker


STEP 1

Use an electric screwdriver to remove the speaker cover screws. Retain hardware for later use.



STEP 2

Remove the speaker cover and locate the speaker wiring harness.

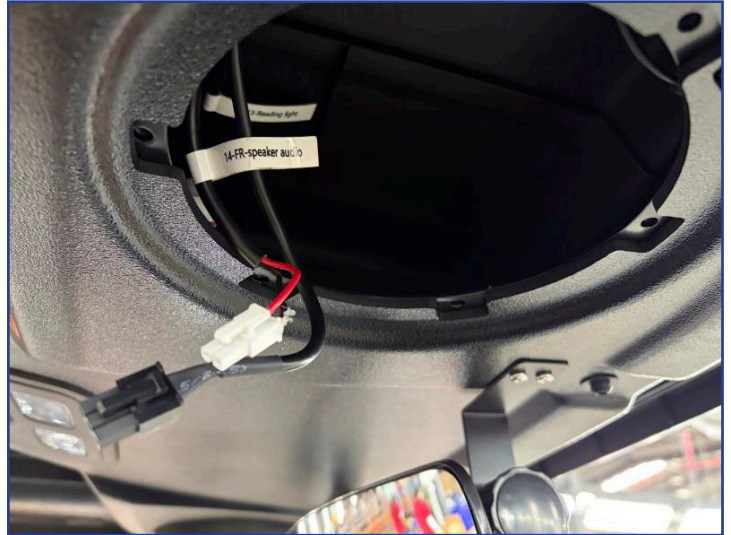

STEP 3

Connect the wiring harness to the speaker (**ensure the hook is engaged**).



STEP 4

Secure the speaker (**logo facing forward**).



STEP 5


Install the other 3 speakers following the same steps.

Note: When installing the roof speakers, do not over-tighten the hardware. If the screws are tightened too much, stripping may occur!

Section 4 - Install and Secure Amplifier


STEP 1

Open the front trunk, and use an electric screwdriver to remove the screws and the support rod of the trunk. Retain hardware for later use.

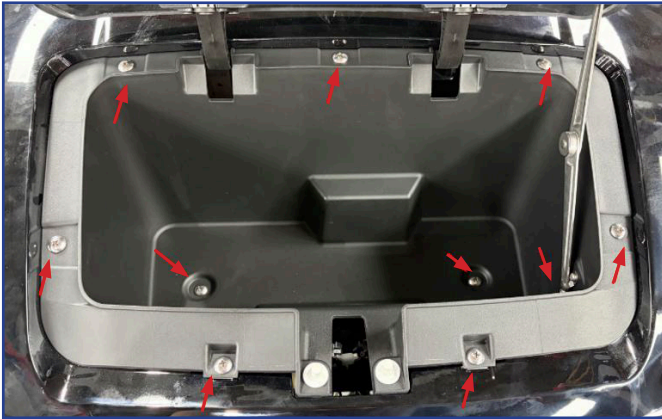

STEP 2


Pre-install two screws on the passenger side of the amplifier position as shown.

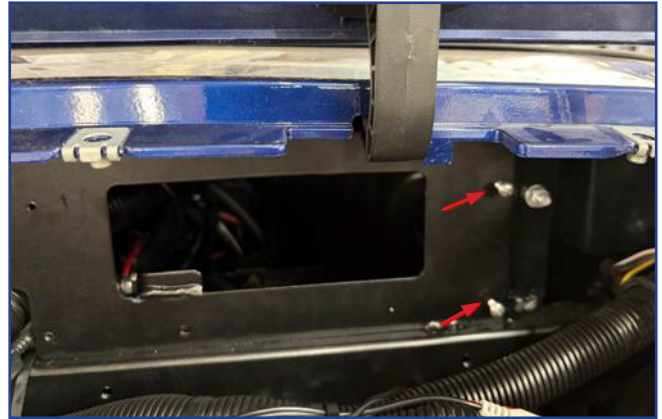

STEP 3

Insert the U-shaped hole on the passenger side end of the amplifier onto the screws (with the wiring harness facing driver's side), then pull the amplifier toward the driver side to engage the slots securely.

Note: Amplifier pictured may differ from actual product.

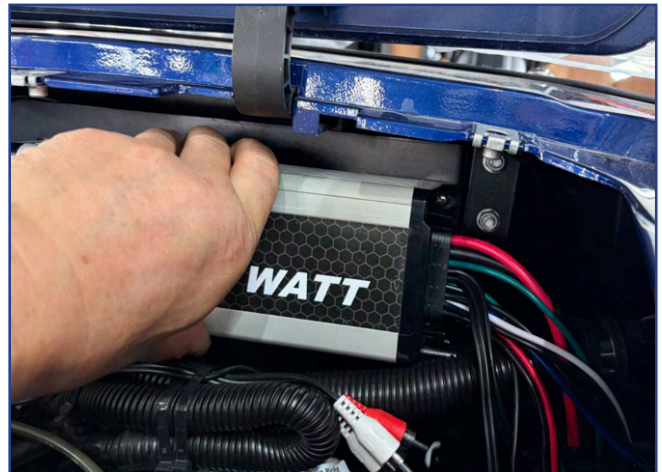

STEP 4

Pre-install the two screws on the driver side (do not tighten them).




STEP 5

First tighten the two screws on the passenger side, then tighten the two screws on the driver side.

Section 5 - Connect Amplifier (Wiring)


STEP 1

Connect the **green** wire of the amplifier to main harness label 10.

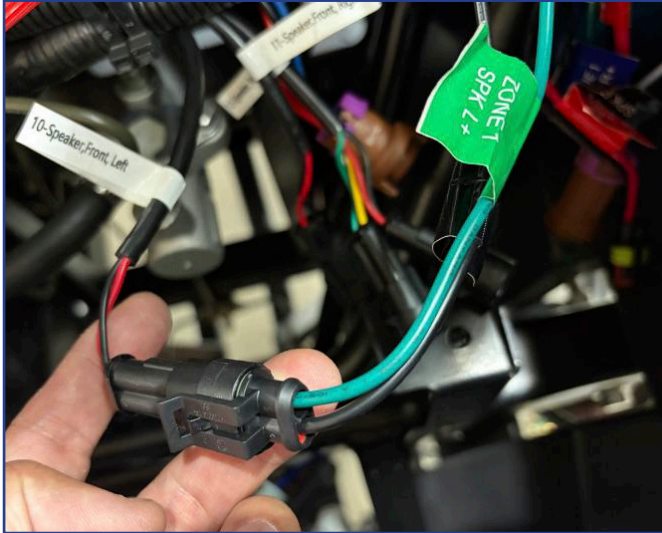


STEP 2

Connect the **blue** wire of the amplifier to main harness label 11.

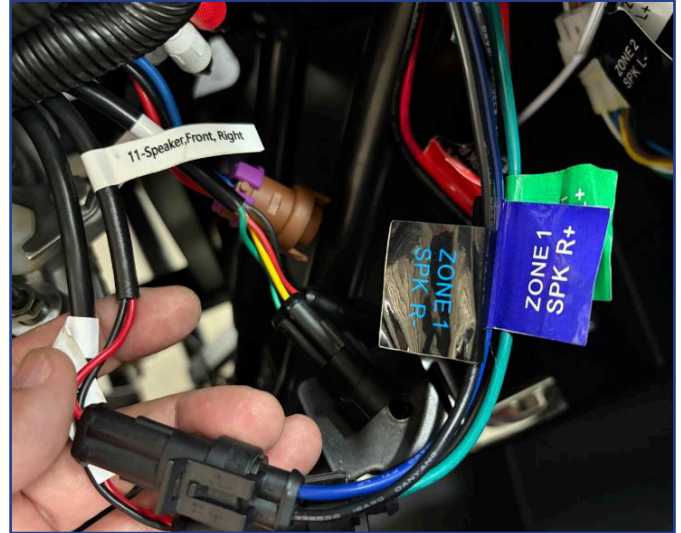


STEP 3

The harness with Zone 2 SPK R+ has a red and black wire, connect this to the 12 Speaker, Rear, Right harness with the red and black wire.

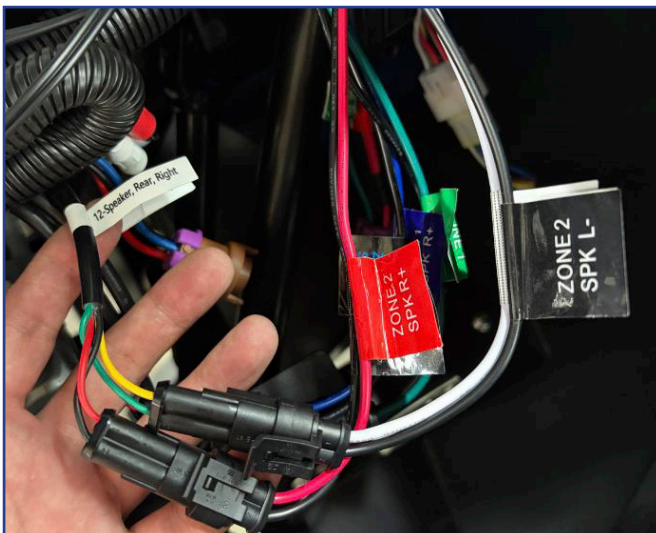


STEP 4

The harness with Zone 2 SPK L- has a grey and white wire, connect this to the 12 Speaker, Rear, Right harness with the yellow and green wire.

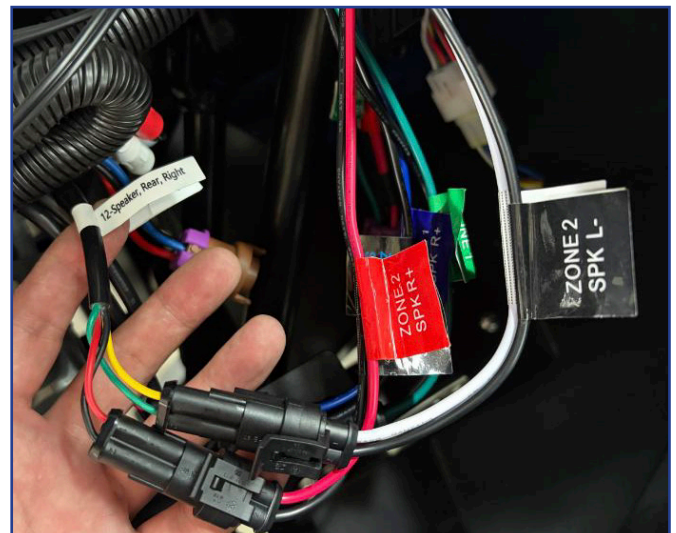


STEP 5

Connect the audio input RCA connectors (each red and white pair as a group)

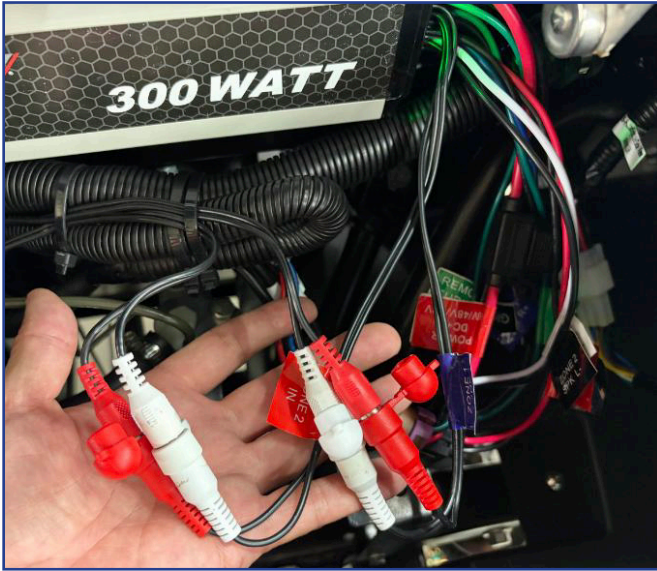


STEP 6

Wrap the RCA connectors with electrical tape to prevent loosening.

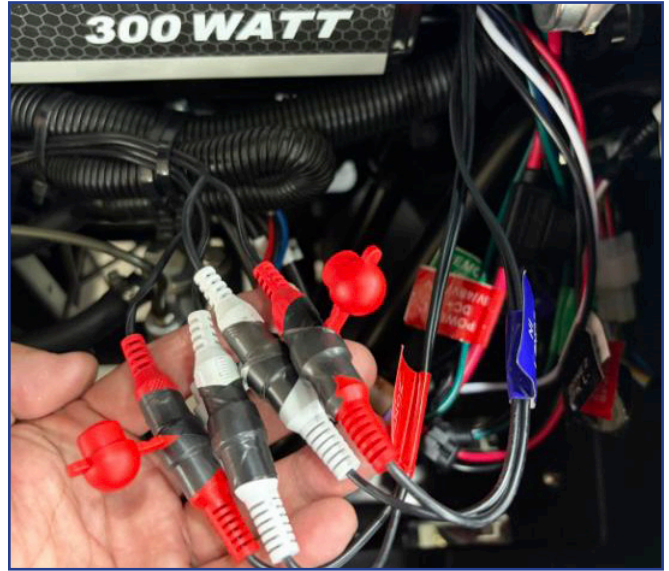


STEP 7

Connect the amplifier power cable.

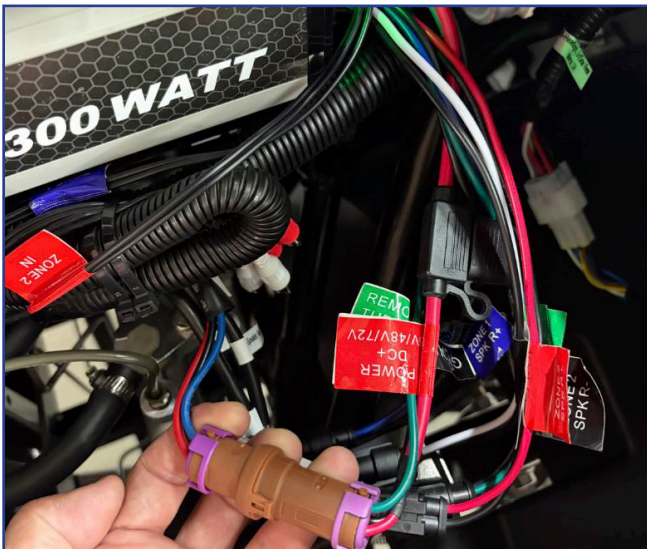

STEP 8

Tidy up the wiring harness and secure it with cable ties.

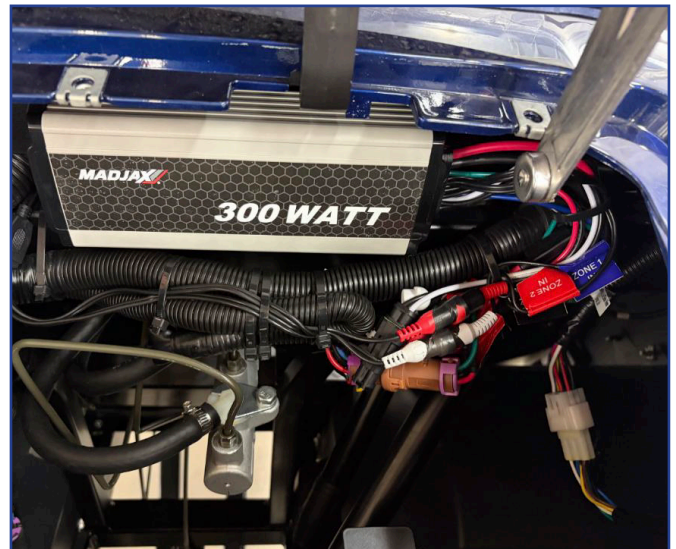

Section 6 - Reinstall the Front Trunk Lid

Start the vehicle, confirm that the amplifier is working, then reinstall the front trunk lid.

INSTALLATION COMPLETE